



LEAHUA



SP Amplifier 4

SP-AP004

This manual contains important information.
Please read before operating fixture.

Guangzhou Leahua Lighting Technology Ltd
[http:// www.leahualighting.com](http://www.leahualighting.com)

Index

| | |
|-----------------------------------|-----------|
| 1. Technical Specifications | 2 |
| 2. Operation Instruction | 错误！未定义书签。 |
| 3. Connecting diagram | 错误！未定义书签。 |
| 4. Maintenance & Cleaning | 4 |
| 4.1 Cleaning | 4 |

Accessories

In addition to the lamp, also matching accessories are as follows:
accessories: Power line 1 piece Optional parts: (customers)

1. Technical Specifications

Two fixed methods:

light hook slide rail hanging and tripod support to meet the needs of different scenes. Built-in 4-channel signal amplifier to avoid the uncontrolled impact of lighting caused by signal attenuation.

Main features:

Built-in 4-channel signal amplifier

The upper part of the frame has a slide groove.

Customer-specified assembly: overload protector

Input voltage range: 100-240V~ 50/60Hz

Power outlet: power connector input/output

4 European plug-in industrial sockets

Signal input/output: 1 3-pin signal input, 5 3-pin signal output (optional 5-pin)

Product size:1207x87.6x76mm

Weight: 4kg


Selection:

Light hook*2

Tripod*1

2. Appearance

Dimensions:

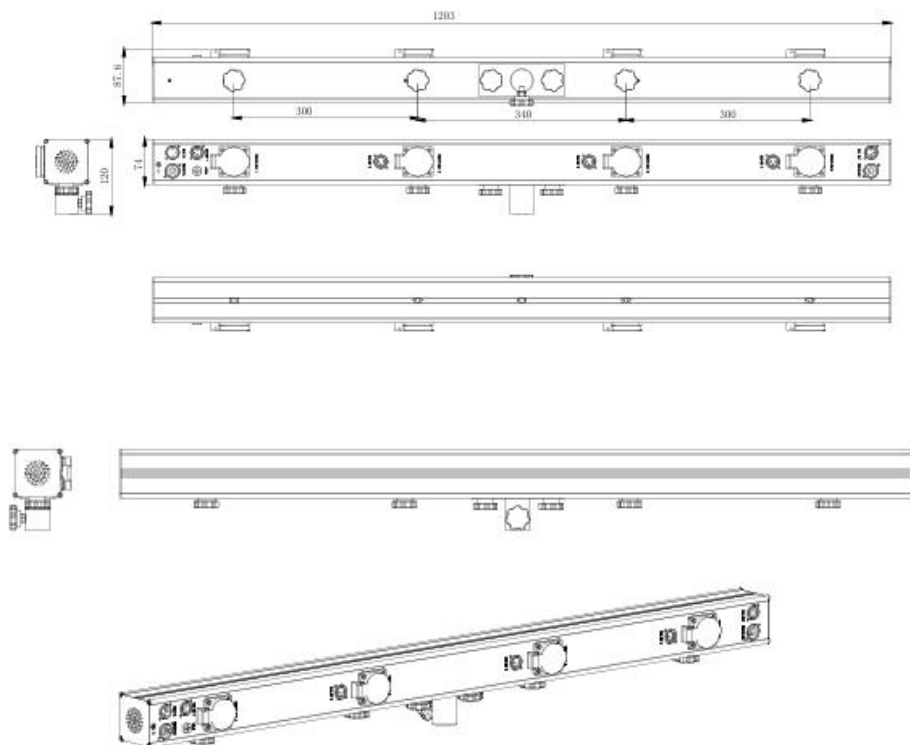

3. Maintenance & Cleaning

Regular maintenance is essential to ensure optimal performance and extend the service life of the fixture.

3.1 Cleaning

Disconnect the unit from power before any cleaning work.

Use a soft, lint-free cloth slightly dampened with mild detergent to clean the exterior surfaces.

Gently remove dust from ventilation slots, optical lenses, and cooling components using compressed air or a soft brush.

Avoid using solvents, alcohol, or abrasive materials that may damage the housing or optical elements.



Guangzhou Leahua Lighting Technology Ltd

Rm 1004, Building A
Baiyun Lake Future Technology Center
No,1 Xinghu Street, Shimen, Baiyun district
Guangzhou 510440, China
