



SP Amplifier 8 IP

SP-AP008

This manual contains important information.
Please read before operating fixture.

Guangzhou Leahua Lighting Technology Ltd
[http:// www.leahualighting.com](http://www.leahualighting.com)

Index

1. Technical Specifications	2
2. Panel Instruction	3
3. Maintenance & Cleaning	5
3.1 Cleaning	5


CA8802Mod PC list

PC item	PC	QTY
1	CA8142M	1
2	Power cable	1

1. Technical Specifications

Voltage	AC110V-60Hz/AC220V-50HZ
Input and output Agreement	International DMX512 Agreement
transmission capacity	Supporting 512channels's real time transmission
Signal output	single group 1 way input ,8 ways output or double groups 1 way input, 4 ways output ;optical isolation ;separately output
The canon of Signal connection	Input XLP-3-M,output XLR-3-F
Political isolation of the input to the output	>AC300V
size	484*45*140mm "19"1U
Wight	


2. Panel Instruction

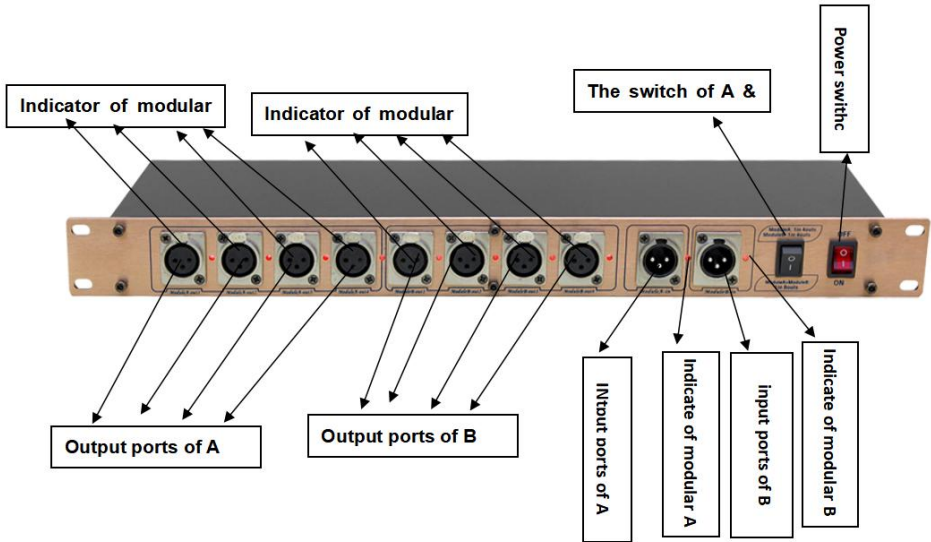

DMX512 signal input (output)canon is 3-XLRconnector-pin port allocation:

3-XLRconnector-pin port	signal
1	Earth (shield)
2	Data -
3	Data +

Block Diagram of the application:

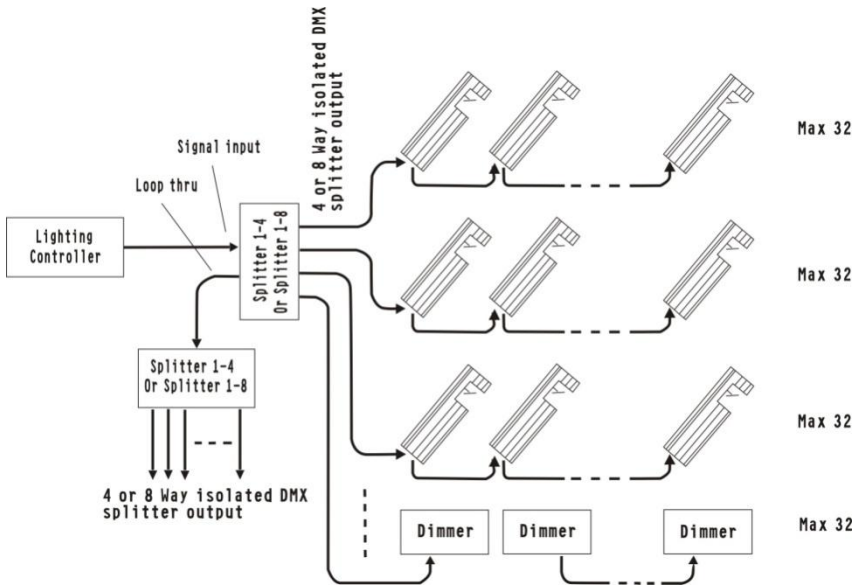

3. Maintenance & Cleaning

Regular maintenance is essential to ensure optimal performance and extend the service life of the fixture.

3.1 Cleaning

Disconnect the unit from power before any cleaning work.

Use a soft, lint-free cloth slightly dampened with mild detergent to clean the exterior surfaces.

Gently remove dust from ventilation slots, optical lenses, and cooling components using compressed air or a soft brush.

Avoid using solvents, alcohol, or abrasive materials that may damage the housing or optical elements.



LEAHUA

Guangzhou Leahua Lighting Technology Ltd

Rm 1004, Building A
Baiyun Lake Future Technology Center
No,1 Xinghu Street, Shimen, Baiyun district
Guangzhou 510440, China
